


## MINI Golden

- Magnetic drive pump PP PVDF 0,5 - 7 m<sup>3</sup>/h
- PP or PVDF solid monoblocc filter housing
- Fast locking by 4 PP M6 handles with bolts closure system
- Drain and vent valve
- Single or double housing version connecte in parallel
- Tmax = 75°C PP - 95°C PVDF
- Cartridge tight independant from cylinder lenght
- Waterproof switch



## MINI Plus

- Magnetic drive pump PP PVDF 0,5 - 7 m<sup>3</sup>/h
- PP or PVDF solid monoblocc filter housing
- Plexiglass cylinder version
- Fast cocking by PP nut
- Drain and vent valve
- Single or double housing version connectel in parallel
- Tmax = 60°C Plexiglass - 70°C PP - 95°C PVDF
- Cartridge tight independant from cylinder lenght
- Waterproof switch

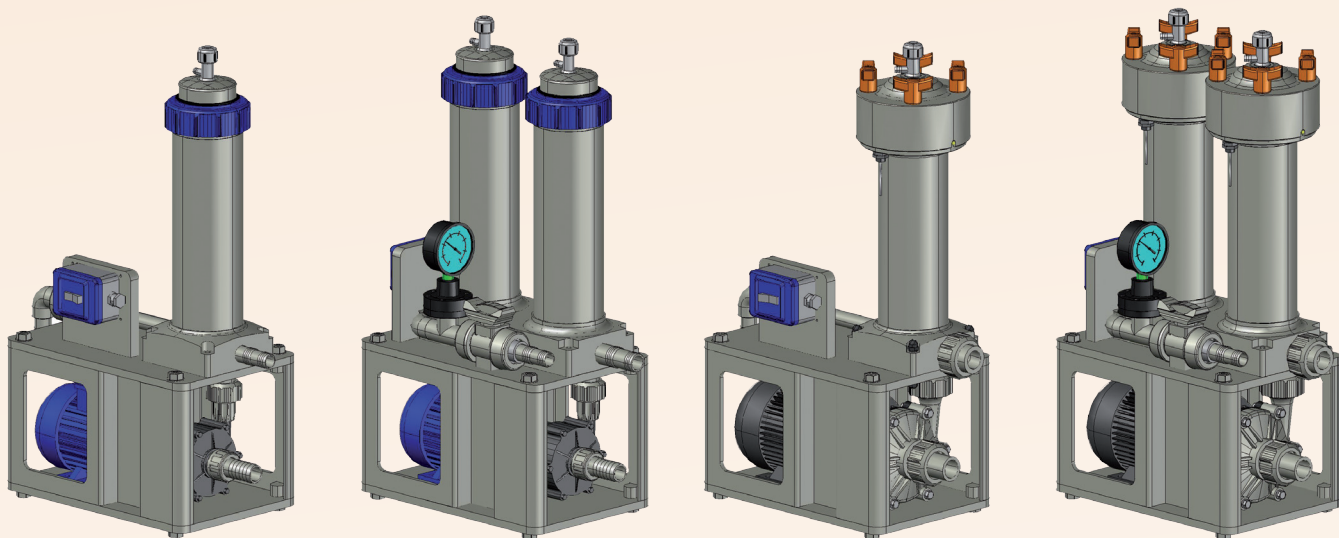

VERSION "MINI P"

VERSION "MINI 2P"

VERSION "MINI G"

VERSION "MINI 2G"

Mod	FILTER HOUSING				CONNECTION	PUMP		OPTIONALS
	MATERIAL	CARTRIDGE H"	VERSION	CHAMBERS N"		MAGNETIC DRIVE	MATERIAL	TYPE
MINI	_ = PP V = PVDF G = Plexiglass	4 10 20 30	P = Plus G = Golden	_ = One 2 = Two	P=Parallel	P09 MPC042 MPP031 MPP051 MPP052 EVT7	_ = PP F = PVDF	I = interlock lis sensor (Only for version G) G = pressure gauge with guard
MINI	V	20	P			EVT7	F	G

50 Hz	EVT7	MPP051 MPP052	MPP031	MPC042	P09
Kw	0,25	0,12	0,09	0,12	0,054
A* 230/1V	2,2	0,96	0,48	0,96	0,43
A* 230/400V	1,2/0,70	0,77/0,44	0,52/0,30		

\* data can change accordind with motor type

